


	INTAKE	EXHAUST
ADVERTISED DURATION	280°	280°
ACTUAL CAM LIFT (in/mm)	.399" / 10.13mm	.399" / 10.13mm
ROCKER ARM RATIO	1.75:1	1.75:1
CENTERLINE	108°	116°
LOBE SEPERATION	112°	
DURATION AT 0.050" CAM	196°	197°
DURATION AT 0.050" VALVE	212°	213°
VALVE CLEARANCE	.000" / 0mm HYDRAULIC	.000" / 0mm HYDRAULIC
RECOMMENDED SPRING KIT	BC0159 or BC0160	

CAMSHAFT TIMING AT 0.050" VALVE LIFT	OPEN	CLOSES
	INTAKE	2° ATDC
EXHAUST	42.5° BBDC	9.5° BTDC

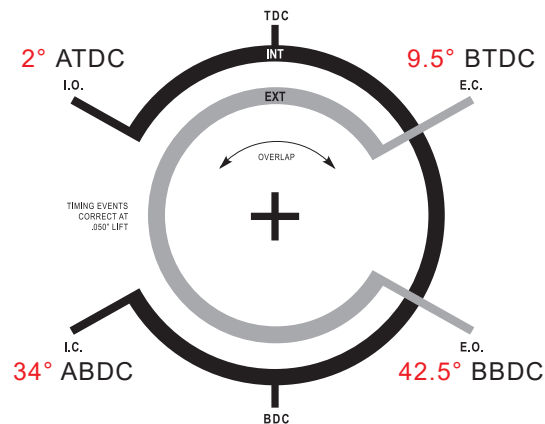

NOTES

BC does not recommend using synthetic oil during break-in or operation. Follow OEM manufacturer's torque sequence and specifications. Use liberal amount of aftermarket engine assembly lube during installation. Check follower or bucket surfaces for abnormal wear and/or scuffing. On initial start-up and break-in run engine at 1500-2500 rpm for 20 minutes. **Camshafts damaged by improper installation, excessive spring pressure or retainers contacting valve guides or seals are void from warranty. Not legal for sale or use on emission controlled motor vehicles.**

